



Dimensions

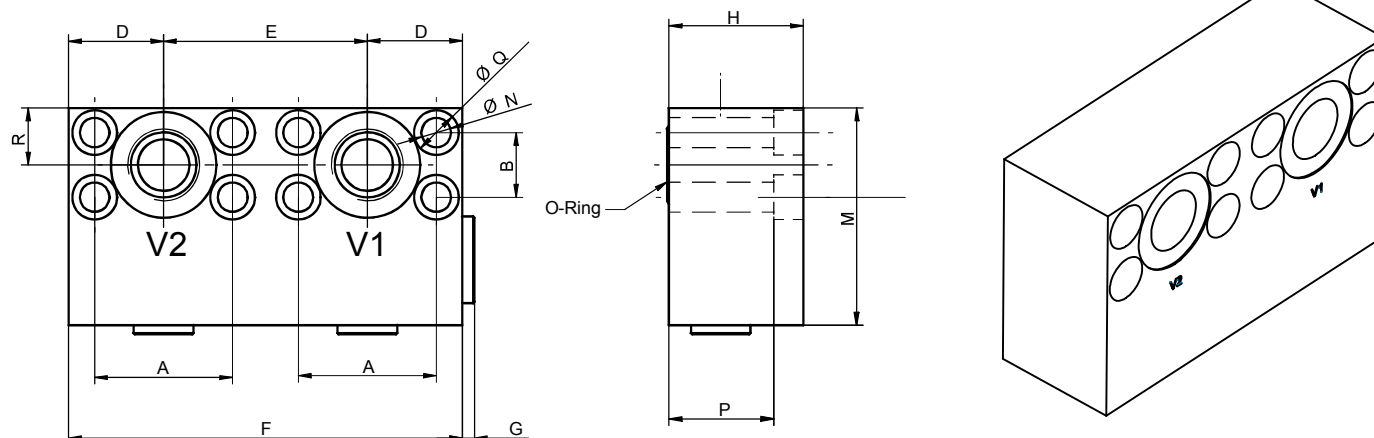

Size	V1-V2 BSP	A	B	C1-C2 Ø	D	E	F	G	H	M	N Ø	P	Q Ø	R	Weight kg
03	1/2	40,5	18,2	13,5	28	59	115	4,5	39,5	70	13,5	29,5	8,5	17	2,05
04	3/4	50,8	23,8	19	35	75	145	4,5	49,5	80	16,5	38,5	11	21	3,55
05	1	57,2	27,8	25	39,5	84	163	4,5	49,5	90	18,5	36	12,5	25	4,38
06	1	66,7	31,8	30	47,5	99	194	4,5	59,5	100	22	45,5	15	28	7,95

Hydraulic Symbol

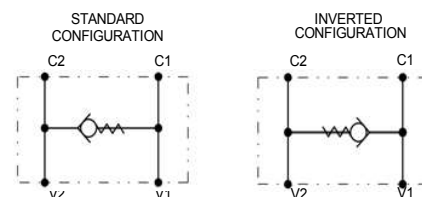

Features

Size	03	04	05	06
Max Pressure (bar)	350	350	350	350
Max Flow (lpm)	120	170	250	320
V1 - V2 Ports (BSP)	1/2	3/4	1	1
C1 - C2 Ports (Ø mm)	13,5	19	25	30
Cracking Pressure (bar)	0,5	0,5	0,5	0,5

Materials: Zinc plated steel body.

Ordering Code

ACVSU			--		-	
V1-V2 Size (BSP)			C1-C2 Size (Ømm)		Configuration	
03	1/2	13,5				Standard configuration
04	3/4	19			R	Inverted configuration
05	1	25				
06	1	30				

Ordering Code Example: ACVSU04R = 3/4 BSP (V1 - V2), Ø19 mm (C1 - C2), inverted configuration