

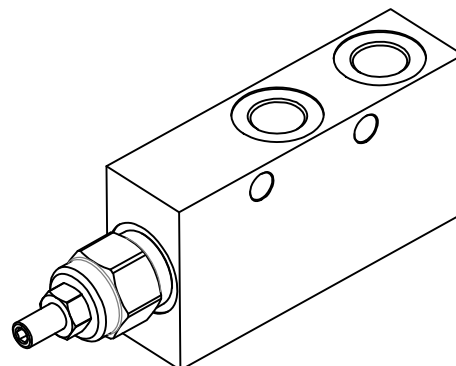


### Dimensions

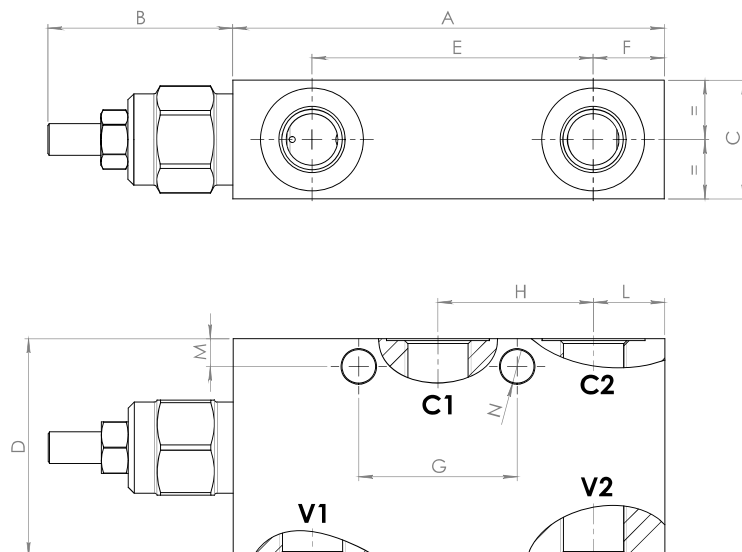


| Size | A   | B  | C  | C1 - C2<br>V1 - V2 | D  | E  | F  | G  | H    | L  | M | N   | Weight<br>kg |
|------|-----|----|----|--------------------|----|----|----|----|------|----|---|-----|--------------|
| 02   | 109 | 47 | 30 | 3/8                | 55 | 71 | 18 | 40 | 39,3 | 18 | 7 | 8,5 | 1,18         |
| 03   | 109 | 47 | 35 | 1/2                | 65 | 71 | 18 | 40 | 39,3 | 18 | 8 | 8,5 | 1,75         |

### Hydraulic Symbol



### Curves

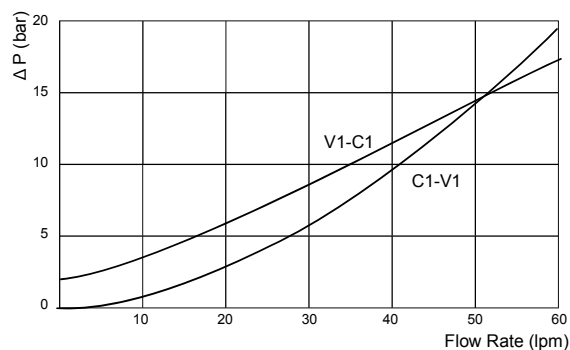

### Features

|              |         |
|--------------|---------|
| Rated Flow   | 60 lpm  |
| Max Pressure | 350 bar |

**Materials:** Zinc plated steel manifold, hardened steel inner parts.

**Notice:** Relief setting at least 1,3 times the highest expected load-induced pressure.

### Ordering Code

**CBSL**

--

--

-

#### Port Size BSP

|    |     |
|----|-----|
| 02 | 3/8 |
| 03 | 1/2 |

#### Spring

|    | Pressure Range<br>(bar) | Increase<br>(bar/turn) | Standard Setting<br>(bar) Q=5 lpm |
|----|-------------------------|------------------------|-----------------------------------|
| 20 | 60 - 210                | 61                     | 180                               |
| 30 | 100 - 350               | 100                    | 250                               |

#### Pilot Ratio

|   |         |
|---|---------|
|   | 4,2 : 1 |
| 8 | 8 : 1   |

**Ordering Code Example:** CBSL0330 = 1/2 BSP Ports - 100-350 bar setting range, 4,2:1 Pilot Ratio.