

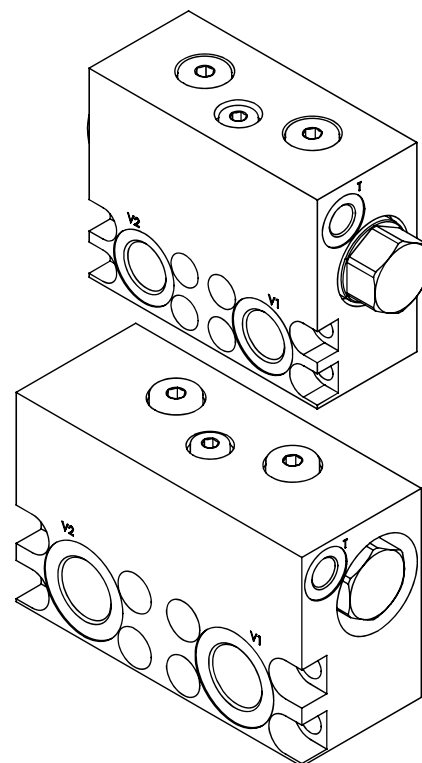


Dimensions

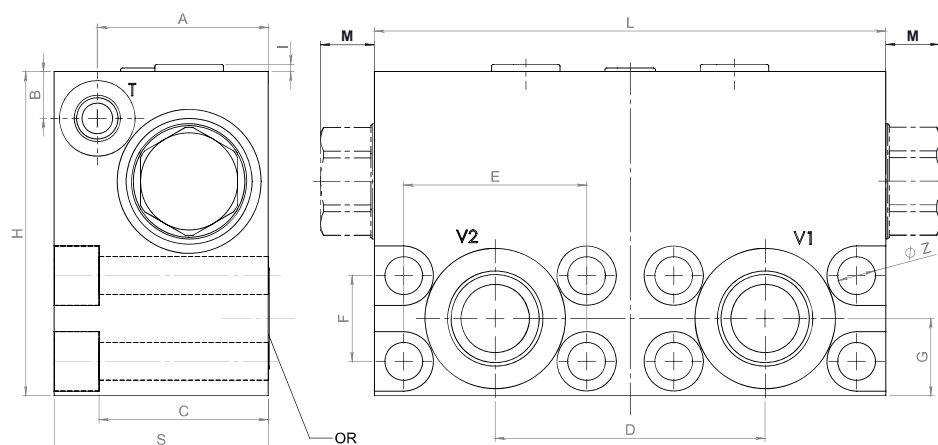

Size	A	B	C	D	E	F	G	H	I	L	M	S	ØZ	OR
03	36,5	15,5	39	59	40,5	18,2	17,6	90	-	113,5	15	49,5	8,5	18,64x3,53
04	47,5	13	47	75	50,8	23,8	21,4	90	2	142	-	59,5	10,5	23,40x3,53
05	47,5	17	45	84	57,5	27,8	25	100	-	160	-	59,5	12,5	32,93x3,53
06	48	12	44,5	99	66,7	31,8	28,5	100	4,5	194	-	59,5	15	36,09x3,53

Hydraulic Symbol

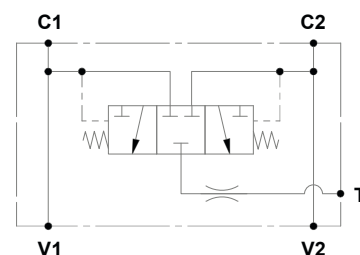

Features

Size	03	04	05	06
Max Pressure (bar)	420	420	420	420
Max Flow Rate (lpm)	150	300	500	600
Flushing Flow (lpm)	6 ÷ 8	8 ÷ 10	10 ÷ 12	13 ÷ 15
Orifice Diameter (mm)	1,7	1,9	2,1	2,4
Port Sizes	V1 - V2: G 1/2 C1-C2: 1/2 SAE6000 T: G 1/4	V1 - V2: G 3/4 C1-C2: 3/4 SAE6000 T: G 1/4	V1 - V2: G 1 C1-C2: 1 SAE6000 T: G 1/4	V1 - V2: G 1 C1-C2: 1 1/4 SAE6000 T: G 1/4

Materials: Zinc plated steel manifold

Ordering Code

VPURX	--	T01
-------	----	-----

	Port Size BSP
03	1/2
04	3/4
05	1
06	1

Ordering Code Example: VPURX05T01 - 1" port size.