

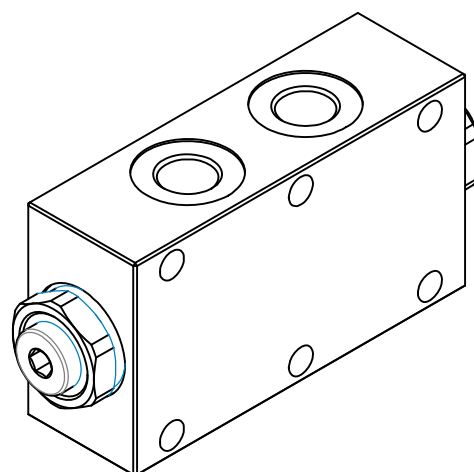


Dimensions

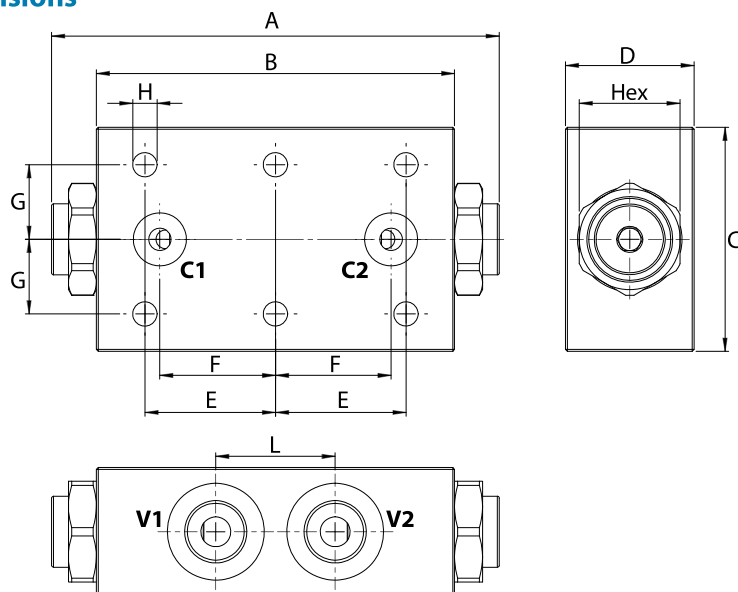


Size	V1-V2 BSP	A	B	C	C1-C2	D	E	F	G	H	L	Hex	Weight kg
01	1/4	113	90	50	Ø 5	30	35	26	20	6,5	32	22	0,43
15	3/8	113	90	50	Ø 5	30	35	26	20	6,5	32	22	0,43
02	3/8	121	96	60	Ø 6	35	35	31	20	6,5	32	27	0,60
25	1/2	121	96	60	Ø 6	35	35	31	20	6,5	32	27	0,60
03	1/2	140	110	70	Ø 10	35	40	32,5	20	8,5	34	30	0,89
04	3/4	220	165	90	Ø 14	50	67,5	52,5	25	10,5	50	41	2,50

Hydraulic Symbol




Curves

V1 → C1
V2 → C2



C1 → V1
C2 → V2



Features

Size	01	15	02	25	03	04
Max Pressure (bar)	260	260	260	260	260	260
Max Flow (lpm)	20	20	35	35	60	100
Pilot Ratio	1:4	1:4	1:7	1:7	1:3,4	1:4
Cracking Pressure (bar)	4	4	4	4	3	8

Materials: Aluminium manifold, hardened steel inner parts.

Ordering Code

LVDF

--

Size BSP

01	1/4
15	3/8
02	3/8
25	1/2
03	1/2
04	3/4

Ordering Code Example: LVDFV15 = 3/8 BSP, 20 lpm.